

High efficient supply chain



## INDUSTRIAL EQUIPMENT

One-Stop Procurement Platform in Oil & Gas Energy Industry



Address : No. 224 Naner Road, Dongying, Shandong, P.R.C  
P.C : 257067  
Tel : +86 400 820 9199  
E-mail : sales@erui.com

© COPY RIGHT BY Erui International Electronic Commerce Co.,Ltd.

Due to the continuous progress of technology, technical parameters may be changed in later times, please understand for all the inconvenience caused by it. The information explanation right belongs to ERUI, and all graphic information contained herein is the property of ERUI. No part of this publication may be reproduced or used for any purpose without the written permission of ERUI .

# ABOUT ERUI

## GLOBAL PROCUREMENT PLATFORM FOR ENERGY INDUSTRY

ERUI International is a cross-border industrial platform of "industry + internet" in oil & gas field. Provide high efficient supply chain integration service to customers.

Relying on global marketing and service network, purchasing ideas and management experiences, on a mission of high efficient supply chain , ERUI set up one-stop procurement platform in oil & gas energy industry.



### BUSINESS FOCUS DIRECTION

Focus on industrial consumables in oil&gas field, spare-parts, tools, general equipment and other industrial consumer goods in oil&gas field.



### PREPONDERANT PRODUCTS

Industrial Equipment Division, Drilling and Completion Equipment Division, Kangshield Safety Protective Technology Division, Electric and Electrical Division, Industrial Tool Division.

48

Branches

3500+


Global Customers

40000+

SPU

300000+

SKU (specification)

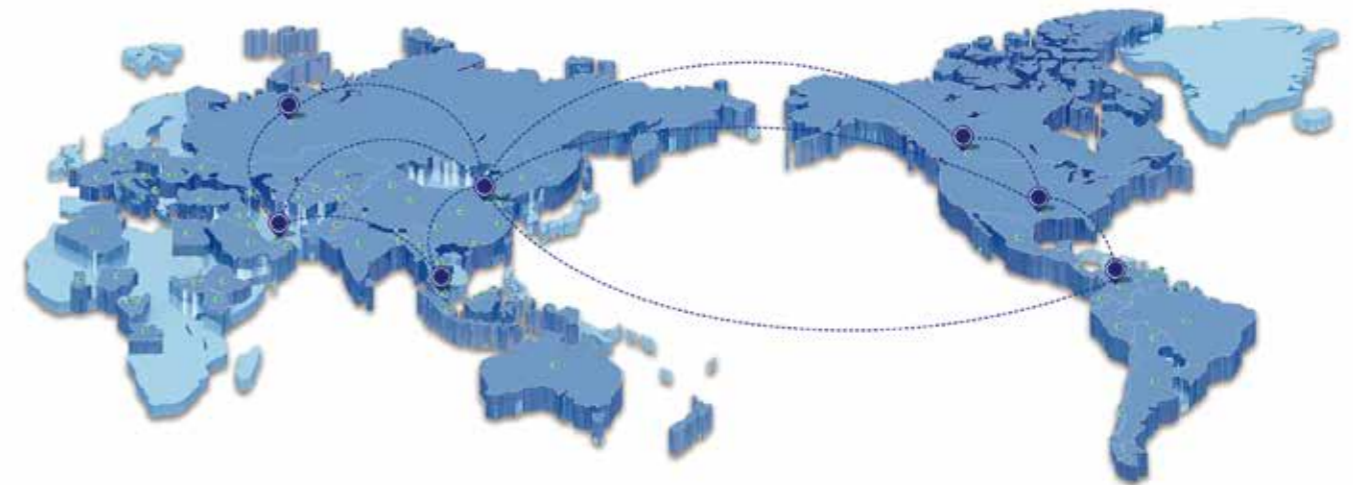

- North America**  
 Canada  
 U.S.A  
 Mexico
- South America**  
 Colombia  
 Argentina  
 Bolivia  
 Venezuela
- Trinidad and Tobago  
 Suriname  
 Peru  
 Ecuador  
 Brazil  
 Panama  
 Chile
- Africa**  
 Algeria
- Egypt  
 Gabon  
 Congo (Brazzaville)  
 Nigeria  
 South Sudan  
 Ethiopia  
 Kenya  
 Ghana  
 Angola
- Middle East**  
 UAE  
 Iraq  
 Kuwait  
 Oman  
 Saudi Arabia  
 Turkey
- Europe**  
 Russia
- Ukraine  
 Azerbaijan  
 France  
 Italy  
 Holland  
 Germany  
 Poland  
 Romania
- Albania  
 Croatia
- Central Asia**  
 Kazakhstan  
 Turkmenistan  
 Kyrgyzstan  
 Tajikistan  
 Uzbekistan
- Asia&Pacific**  
 Indonesia  
 Australia  
 India  
 Malaysia  
 Brunei  
 Pakistan  
 Bangladesh  
 Thailand
- Myanmar  
 Singapore
- China**  
 Beijing  
 Shanghai  
 Tianjin  
 Dongying  
 Xinjiang  
 Qinghai
- Sichuan  
 Daqing  
 Xi'an  
 Zhanjiang

## Generators

### Normal Diesel Generator Set



Product advantages: Easy operation, high efficiency, lower fuel consumption, long service life, low carbon and environmental protection, and wide application;  
 Application areas: Emergency power generation in factories, oilfield mine operations, engineering buildings, ships, etc.;  
 Product standards: ISO 8528.

Normal Diesel Generator Set																		
Voltage & Frequency	400V/230V ; 50Hz/60Hz ; Other voltages are accepted for customization																	
Rated Capacity (KVA)	76	91	170	230	400	500	569	625	681	750	900	995	1253	1364	1510	1710		
Rated Power (KW)	61	73	144	185	320	400	455	500	545	600	720	796	1002	1091	1208	1368		
Reserve Capacity (KVA)	84	100	190	253	438	550	624	687	750	825	1000	1097	1378	1500	1669	1880		
Reserve Power (KW)	67	80	158	202	350	440	500	550	600	660	800	878	1002	1200	1329	1500		
Rotating Speed (R/min)	1500/1800																	
Engine Brand	Optional: Cummins, Perkins, Volvo, MTU, Yuchai, Shangchai, Weichai, etc.																	
Generator Brand	Optional: Stamford, Leroy Somer, Marathon, Inge, etc.																	
Controller Brand	Optional: Deepsea, ComAq, Smartgen, Harsen, DEIF, etc.																	
Phase	Three-phase four-wire system																	
Overall Size (mm)	1900*700*120			3100*1120*172			4200*1720*221			4880*1990*235			5150*2112*2560					
Net Weight (kg)	875		1100		2440		3190		4400		5120		7025		8980		10180	

### Moveable Power Station



Product advantages: The casing is corrosion resistant and has a good degree of sealing. A silent solution is available to reduce noise pollution in the outdoor environment;  
 Application areas: Mobile power generation in remote areas such as factories, oilfield mine operations, and road construction;  
 Product standard: ISO 8528.

Moveable Power Station																								
Voltage & Frequency	400V/230V ; 50Hz/60Hz ; Other voltages are accepted for customization																							
Rated Capacity (KVA)	135	200	250	375	450	500	625	800	1000	1250	1500	1875	2080											
Rated Power (KW)	108	160	200	300	360	400	500	640	800	1000	1200	1500	1664											
Reserve Capacity (KVA)	150	220	275	413	495	550	688	880	1100	1375	1650	2063	2288											
Reserve Power (KW)	120	176	220	330	396	440	550	704	880	1100	1320	1500	1830											
Rotating Speed (R/min)	1500/1800																							
Engine Brand	Optional: Cummins, Perkins, Volvo, MTU, Yuchai, Shangchai, Weichai, etc.																							
Generator Brand	Optional: Stamford, Leroy Somer, Marathon, Inge, etc.																							
Controller Brand	Optional: Deepsea, ComAq, Smartgen, Harsen, DEIF, etc.																							
Phase	Three-phase four-wire system																							
Overall Size (mm)	2470*960*1500			2950*1150*1710			4520*1600*2280			5300*2210*2590			6000*2400*2600											
Net Weight (kg)	1000		1600		2000		2100		2200		2650		3580		6850		7200		7800		10550		15210	

### Sound Proof Generator Set



Product advantages: The inside of the box is made of high-performance sound-absorbing materials, which is convenient for transportation, low noise, safe and reliable;  
 Application areas: Emergency power generation in areas requiring environmental noise such as factories, mine operations, engineering buildings, and ships;  
 Product standard: ISO 8528.

Sound Proof Generator Set																								
Voltage & Frequency	400V/230V ; 50Hz/60Hz ; Other voltages are accepted for customization																							
Rated Capacity (KVA)	100	135	180	200	250	375	450	625	800	910	1000	1250	1500	1875	2080									
Rated Power (KW)	80	108	144	160	200	300	360	500	640	728	800	1000	1200	1500	1664									
Reserve Capacity (KVA)	110	150	198	220	275	413	495	688	880	1000	1100	1375	1650	2063	2288									
Reserve Power (KW)	88	120	158	176	220	330	396	550	704	800	880	1100	1320	1500	1830									
Rotating Speed (R/min)	1500/1800																							
Engine Brand	Optional: Cummins, Perkins, Volvo, MTU, Yuchai, Shangchai, Weichai, etc.																							
Generator Brand	Optional: Stamford, Leroy Somer, Marathon, Inge, etc.																							
Controller Brand	Optional: Deepsea, ComAq, Smartgen, Harsen, DEIF, etc.																							
Phase	Three-phase four-wire system																							
Noise (db)	65-75																							
Overall Size (mm)	2950*1150*1710			3700*1545*2000			4520*1600*2280			4850*2000*2590			4850*2000*2590											
Net Weight (kg)	1000		1600		1850		2000		2800		3500		4300		7200		7800		10000		15000		15210	

■ Container Generator Set



Product advantages: Hoisting capacity and rainproof performance, easy to use and maintain;  
 Application areas: Factories, oilfield mine operations, and other emergency power generation;  
 Product standard: ISO 8528.

Container Generator Set												
Voltage & Frequency	400V/230V ; 50Hz/60Hz ; Other voltages are accepted for customization											
Rated Capacity (KVA)	750	800	910	1000	1125	1250	1375	1500	1705	1875	2080	
Rated Power (KW)	600	640	728	800	900	1000	1100	1200	1364	1500	1664	
Reserve Capacity (KVA)	750	800	910	1000	1125	1250	1375	1500	1705	1875	2080	
Reserve Power (KW)	660	704	800	880	1000	1100	1210	1320	1324	1650	1830	
Rotating Speed (R/min)	1500/1800											
Engine Brand	Optional: Cummins, Perkins, Volvo, MTU, Yuchai, Shangchai, Weichai, etc.											
Generator Brand	Optional: Stanford, Leroy Somer, Marathon, Inge, etc.											
Controller Brand	Optional: Deepsea, ComAq, Smartgen, Harsen, DEIF, etc.											
Phase	Three-phase four-wire system											
Overall Size (mm)	6058*2438*2590			12230*2438*2590			12230*2438*2890			12192*2438*2890		
Net Weight (kg)	6720	6720	9400	9400	11100	11100	10500	11000	14400	16100	16400	

■ Small Gasoline Generator Set



Product advantages: Low fuel consumption, low emissions, stable output, long-lasting power, firm frame, long life and easy movement;  
 Application areas: Outdoor emergency power generation such as construction, factory, mine construction and camping navigation;  
 Product standard: ISO 8528.

Small Gasoline Generator set								
Frequency (Hz)	50/60							
Rated Power (KW)	2.0	2.8	3.2	5.5	6.5	7.0	7.5	8.0
Maximum Power (KW)	2.2	3.2	3.5	6.0	7.0	7.5	8.2	8.5
Rated Voltage (V)	120/240							
Maximum Horsepower (HP)/(rpm)	6.5 / 3600	7 / 3600	7.5 / 3600	14.0 / 3600	13 / 3600	16 / 3600		
Engine Model	AP series							
Phase	single-phase							
Oil Type	Lead-free motor oil for vehicles							
Fuel Type	90# and above gasoline							
Fuel Tank Capacity (L)	15				25			
Displacement (cc)	196	208	223	420		459		
Noise (db)	65-74							
Overall Size (mm)	620*480*500	620*480*500	620*480*500	720*550*580				
Net Weight (kg)	50	52	53	85	88	93	94	96

■ Small Diesel Generator Set



Product advantages: Low fuel consumption, low emissions, stable output, long-lasting power, strong frame, long life, and can be equipped with bottom wheels;  
 Application areas: Outdoor emergency power generation such as construction, factory, road construction;  
 Product standard: ISO 8528.

Small Diesel Generator Set							
Frequency (Hz)	50/60						
Rated Power (KW)	2.0	2.8	3.2	5.5	6.5	7.5	8.0
Maximum Power (KW)	2.2	3.2	3.5	6.0	7.0	8.5	9.0
Rated Voltage (V)	120/240						
Maximum Horsepower (HP)/(rpm)	3.5 / 3600	7.0 / 3600	7.5 / 3600	14.5 / 3600		16 / 3600	
Engine Model	FAE Series						
Phase	Single-phase						
Oil Type	Lead-free motor oil for vehicles						
Fuel Type	0# Diesel (temperature above 0°C)						
Fuel Tank Capacity (L)	6	15			25		
Displacement (cc)	98	196	223	420	420	459	480
Noise (db)	65-74						
Overall Size (mm)	630*490*530	630*490*530			725*550*610		
Net Weight (kg)	43	45	48	85	88	94	100

■ **Small Silent Diesel Generator Set**



Product advantages: Low fuel consumption, low emission, low noise, regulation of output, lasting power, long life, easy to move on;

Applications: Small emergency power for public places, like hospitals, offices, ships;

Standard: ISO 8528.

Small Silent Diesel Generator Set				
Frequency (Hz)	50/60			
Rated Power (KW)	4.5	5	5.5	6.5
Maximum Power (KW)	5.0	5.5	6.0	7.0
Rated Voltage (V)	120/240			220/380
Maximum Horsepower (HP)/(rpm)	5.5 / 3600	8.9 / 3600	1.02 / 3600	11.2 / 3600
Engine Model	FAE Series			
Phase	Single-phase / Three-phase			
Oil Type	Lead-free motor oil for vehicles			
Fuel Type	0# Diesel (temperature above 0°C)			
Fuel Tank Capacity (L)	15			30
Displacement (cc)	416	456	499	459
Noise (db)	55-60			
Overall Size (mm)	975*600*880		975*600*950	1115*730*930
Net Weight (kg)	195	198	206	185

■ **Successful Cases**



5 sets of 720KW open diesel generator set for O client in Pakistan



2 sets of 1000KW silent diesel generator set for N client in Venezuela



400 sets of 7KW diesel generator set for One customer in northwest of China



1 set of 1800KW open diesel generator set for S client in Kenya



**Air Compressors**

■ **Variable Frequency Screw Air Compressor**



Product Advantages: Energy-efficient, and converter with a large number of maintenance, monitoring and diagnosis function, easy operation;

Application Fields: Provide air for cleaning piping equipment in refining plant, mine, manufacturing workshop, power plant, etc.;

Product Standard: ISO.

Variable Frequency Belt/ Direct Driven Screw Air Compressor												
Air Displacement	0.36-1.23	0.93-3.20	1.56-5.20	2.4-7.80	4.1-13.50	4.9-16.50	4.1-21.0	4.8-24.10	5.4-29.0	7.5-34.8	8.7-45.0	
	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
Discharge Pressure (m3/min/Mpa)	0.33-1.15	0.87-3.00	1.5-5.00	2.3-7.30	4.0-13.0	4.5-16.10	3.8-20.0	4.6-23.60	5.3-28.5	7.2-32.0	8.4-43.50	
	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
Air Displacement	0.28-1.03	0.81-2.70	1.29-4.25	2.1-6.60	3.5-11.80	4.3-13.90	3.4-17.0	4.0-20.50	4.5-26.5	6.0-28.0	7.6-39.0	
	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Discharge Pressure (m3/min/Mpa)	0.24-0.89	0.66-2.30	1.11-3.75	1.7-5.70	2.9-10.00	3.7-12.30	2.9-14.8	3.6-17.80	4.0-22.5	5.5-26.0	6.9-35.0	
	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
Electric Motor	Power (KW)	7.5	18.5	30	45	75	90	110	132	160	200	250
	Horse Power (HP)	10	25	40	60	100	120	150	180	220	280	340
	Voltage/Frequency (V/H)	380/50										
	Starting Method	AC power, variable frequency starting										
Noise DB (A)	66±2	72±2	74±2	74±2	75±2	75±2	75±2	75±2	75±2	78±2	78±2	
Outlet Pipe Diameter (Inch)	G3/4	G1	G1 1/4	G1 1/2	G2	G2	DN65	DN65	DN80	DN100	DN100	
Work Temperature (°C)	-5°C ~ +45°C											
Discharge Temperature (°C)	Air cooling < Ambient temperature+ 8°C											
Dimensions (For reference)	L (mm)	770	1380	1380	1300	1450	1450	2540	2540	2690	2690	3330
	W (mm)	650	900	900	1000	1450	1450	1640	1640	1740	1740	1850
	H (mm)	850	1150	1150	1465	1795	1795	1780	1780	1880	1880	1935

■ Low Pressure Screw Air Compressor



Product Advantages: As per users' working pressure, it can automatically adjust the compression ratio; Using oil pump force-lubrication; Make sure the adequate oil injection and best oil-gas mixing ratio under the very low exhaust pressure;  
 Application Fields: Provide air for textile, cement and glass industry;  
 Product Standard: ISO.

Low Pressure Screw Air Compressor																
Discharge Pressure (Mpa)	0.3								0.5							
Air Displacement (m3/min)	6.55	10.7	17.5	25.4	39.8	45.6	55.7	92	6.55	10.7	17.5	22.8	25.4	30	39.8	55.7
Motor Power (kW)	22	37	55	90	132	160	200	355	30	45	75	90	110	132	160	250
Noise (dB)	69	70	72	72	73	75	75	78	69	70	72	72	73	75	75	78
Dimensions (For reference)	L (mm)	2000	2800	2990	3160	3460	4200	4200	4400	1680	2220	2560	3110	3110	3660	4160
	W (mm)	1400	1600	1710	1810	2060	2300	2300	2350	1260	1410	1490	1690	1690	1760	2160
	H (mm)	1700	1810	2000	2080	2130	2350	2350	2400	1350	1720	1820	2200	2200	2190	2300

■ Mobile Air Compressor



Product Advantages: Efficient, durable, safe and reliable electrical control system; Humanized protection design. Equipped with inlet pre-heater, good startup under low temperature and high altitude areas;  
 Application Fields: Provide air for highway, oil field services, mining and other industries;  
 Product Standard: ISO.

Electric Mobile Air Compressor										
Compressor	Type	Oil-injection double screw, single-stage compression and mobile								
	Volume Flow	m3/min	8.2	10.2	10	10.2	12	15.7	12	
	Rated Discharged Pressure	bar	10	7.5	12.5	10	7.5	8	14	
	Working pressure range	bar	5~10	5~8	5~13	5~10	5~8	5~8	5~14	
	Lube oil volume	L	54	54	62	54	54	54	54	
	Connection size, number	R1.1/2"x1R1"x1								
	Tire specs	6.516x2								
	Tire pressure	kPa	500~600							
	Wheel track	mm	1560							
	Max working altitude	m	3500							
Motor	LxWxH (For reference)	mm	3220x1850x1750				3460x1700x2240		3950x1970x2020	
	Noise	DB(A)	68-72		70-75		70-75		70-75	
	Model		Y2-225		Y2-250		Y2-280M-2-90			
	Rated Power	kW/HP	55/75		75/100		110/150			
	Rated Speed	rpm	2970		2975		2980		2960	
	Power Supply	V/Hz/Ph	380±10%/50/3							
	insulation Grade		F							
IP Grade		IP54								
Starting Mode		Y-Δ								

Diesel Mobile Air Compressor																
Compressor	Type	Oil-injection double screw , single-stage compression , mobile, screw-type one-stage compression, oil-cooled														
	Air Displacement	m3/min	8.5	10	10	11	13	15	22.5	25.5	17	14	18.5	34	28	
	Working Pressure	bar	10	8	13	10	8	13	14	20	8	18	18	25	10	
	Drive Method	Coupling direct driven, diesel driven														
	Oil-gas Tank Capacity	L	120	150		189	189	173	189	127	189	260	211			
	Oil Capacity	L	48	60		80	105	137	80	80	105	145	140			
Engine	Type	Water-cooled, four-stroke, direct injection														
	Cylinder Number	4			6											
	Rated Power	kw	84/115	110/150			132	194	264	132	179	194	336	264		
	Rated Rotation Speed	rpm	2400	2400/2500			2500	2200	2200	2500	2200	2200	2100	2200		
	No-load Speed	rpm	1400								1300	1400	1400			
	Lubricant	L	20-24	25-28			24	24	24	24	24	24	43	24		
	Cooling Water Volume	L	50	55			55	55	55	55	70	75	75	55		
	Battery		6-QW-150Ahx2	6-QW-200Ahx2			6-QW-150Ahx2	6-QW-200Ahx2	6-QW-150Ahx2	6-QW-165x2	6-QW-165MFx4	6-QW-165MFx4	6-QW-150Ahx4	150Ahx4		
	Fuel Tank Capacity	L	120-160					380	380	380	380	380	380	700	580	
	Dimensions (For reference)	L	mm	2880	2880	3220	3220	3220	3460	3980	4300	3460	3400	3400	4550	4385
W		mm	1740	1740	1850	1850	1850	1700	1980	2100	1700	1980	1980	2300	2290	
H		mm	1760	1760	1850	1850	1850	2240	2320	2700	2240	2210	2210	2630	2529	
Outlet Valve			1-G2", 1-G1"													

■ High/Medium Pressure Air Compressor



Product Advantages: Large cylinder diameter, low rotation speed;  
 Good reliability and durability; Enough air delivery;  
 Application Fields: Pipeline project in oil exploration, coal, oil, industry,  
 gas supply station, etc.;  
 Product Standard: ISO.

Title		Air Displacement (m3/min)	Max.Working Pressure (MPa)	Motor Power (KW)	Overall Dimensions (For reference) (mm)
High/Medium Pressure Air Compressor	2 Stage Compression	0.8	3	9	1080×620×800
		1.25	3	15	1800×650×1450
		1.5	3	15	1500×850×1050
		3	1.7	30	1750×1050×1250
		6	1.7	45	1850×1050×1250
	3 Stage Compression	2.2	4	22	1780×1050×1340
		2.2	3	22	1780×1050×1340
		3.3	3	30	1780×1050×1340
		3	4	30	1650×1250×1250
		0.8	10	15	1300×850×1350
	4 Stage Compression	1	7	15	1300×850×1350
		1	4	15	1300×850×1350
		1	15	22	1650×1450×1140
		1	20	22	1650×1450×1140
		1	30	22	1650×1450×1140
		1	40	22	1650×1450×1140
		2	8	30	1780×1450×1140
		2.2	15	30	1780×1450×1340
		2	30	37	1780×1450×1340
		3	8	30	1780×1450×1140
5 Stage Compression	3	20	45	1780×1450×1340	
	2	45	37	1780×1450×1340	
	3	30	45	1780×1450×1340	
	3	45	55	1780×1450×1340	

■ Oil Free Piston Air Compressor



Product Advantages: 100% oil free, environmental protection; Easy to operate and can automate turn on and turn off; Reliable performance;  
 Application Fields: Food industry, pharmaceutical manufacturing, hospital, automobile maintenance and other industry;  
 Product Standard: ISO.

Oil Free Piston Air Compressor									
Motor Power		Cylinder diameter×No.	Stroke	Speed	Air Displacement	Rated Pressure	Max. Working Pressure	Air Tank Volume	Overall Dimensions (For reference)
HP	KW	PCS×mm	mm	r/min	m3/min	MPa	Mpa	m3	L×W×Hmm
4	3	70×3	55	860	0.4	0.7	0.8	0.175	1470×470×980
4	3	70×2 55×1	55	1050	0.3	1.25	1.4	0.175	1470×470×980
5.5	4	70×3	55	850	0.5	0.7	0.8	0.175	1470×470×980
5.5	4	70×2 55×1	55	1050	0.4	1.25	1.4	0.175	1470×470×980
7.5	5.5	100×2 80×1	72	780	0.65	1.25	1.4	0.25	1800×700×1460
10	7.5	100×3	72	860	1	0.7	0.8	0.312	1800×700×1460
10	7.5	100×2 80×1	72	860	0.75	1.25	1.4	0.312	1800×700×1460
15	11	125×2 110×1	80	800	1.5	0.7	0.8	0.312	1800×780×1500
15	11	125×2 100×1	80	800	1.28	1.25	1.4	0.312	1800×780×1500
20	15	125×2 110×1	110	800	2	0.7	0.8	0.5	1910×800×1650
20	15	125×2 100×1	110	800	1.8	1	1.15	0.5	1910×800×1650
20	15	125×2 100×1	110	800	1.6	1.25	1.4	0.5	1910×800×1650
25	18.5	125×3	110	800	3	0.7	0.8	0.5	1910×800×1650

■ Successful Cases



355KW water cooling air compressor in Algeria Chemical Plant



2 sets of 90KW variable frequency air compressor in Oman



Many sets of 1MPa mobile air compressor in Russia



Oil free variable frequency air compressor in Malaysia Refinery Factory

## Stainless Steel Pipe Fittings

Product advantages:

1. Strong corrosion resistance, acid resistance, corrosion resistance, high temperature resistance, low temperature resistance, even super low temperature, wear resistance and no radioactivity
2. High strength, hardness and good plasticity , good welding performance
3. Difficult to dust pollution and good self-cleaning property



Application areas:

Equipment manufacturer

Refinery

Construction of water conservancy project

Building materials manufacturer

Standard:

ASME/JIS

## Successful Cases



Service Station in Columbia



Pipeline Transportation Project for U Client in Pan Russian Region



Large Engineering Project for A Client in South America



Smooth Delivery of 300 Flanges for E Client in South American



Conventional Products: Elbow series, Tee series, Flanges series, Reducer series, High-pressed fittings, Cap, Socket welding and thread fittings etc.			
Product name	Type	Scope of Production	Thickness range/ Pressure range
Butt Weld Fittings	Seamless pipe fittings	1/4"-24" DN8-DN700	SCH55-SCH160
	Seamed pipe fittings	1/2"-80" DN15-DN2000	SCH55-SCH160
	Nonstandard / prefabricated tube	Execute according to the specification of customer's drawings	
Forged Flanges	Common flanges	1/2"-24" DN15-DN600	CLASS150-CLASS2500
	Large diameter flange	26"-100" DN15-DN2500	CLASS150-CLASS900
	Compound flange	1/2"-60" DN15-DN1500	CLASS150-CLASS2500
	Manhole / hand hole	18"-24" DN450-DN600	CLASS150
	Non - standard forgings	φ20-φ2500	
Forging Pipe Fittings	Combination	Execute according to the specification of customer's drawings	
	Socket type	1/8"-4" DN6-DN100	CLASS2000-9000
	Threaded type	1/8"-4" DN6-DN100	CLASS3000-9000
	Butt welding	1/8"-24" DN6-DN600	CLASS3000-60000

## Cooperative Partners

